

Ceramic Ultra High-Temperature Standard Size Connectors

High Purity Alumina Ceramic

Rated -29 to 650°C (-20 to 1200°F)

ANSI color code shown To order IEC color code see omega.com

- One-Piece Body Design With Cover
- Color-Coded Dot
- Combination Phillips/Slot Screws



High Purity Alumina!

6.35 mm (0.25") Wire Access Hole




NHXH/UHXH Starts at **\$16⁵⁰** Basic Pair

Type UHXH has an unglazed/removable color dot with no ink markings, for high vacuum furnaces where contamination could affect the process. Mating female connector is UHX-(*)-F

PATENTED

Covered by U.S and International patents and pending applications


We make running changes when technical advances allow. Check at time of ordering for additional features.

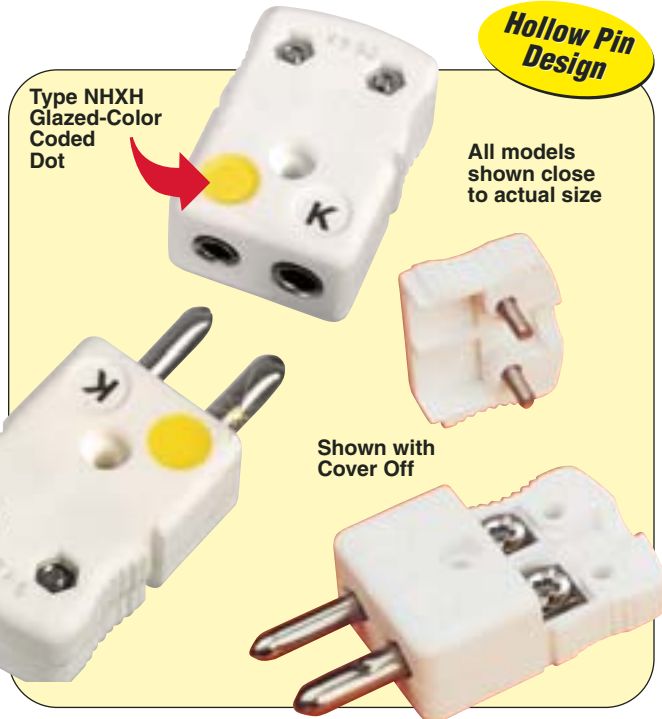

High-Strength Ceramic Construction

Designed for long-term use where economy is a factor, NHXH economy connectors are ideal for high-temperature applications. NHXH connectors are permanently dot-coded to conform to ANSI standards. For applications such as high vacuum furnaces where contamination would adversely affect the process, UHXH connectors are shipped with a removable color-coded dot.

Temperature is limited only by the hardware. CHROME[®]-ALOMEGA[®], Iron-Constantan and CHROME[®]-Constantan alloys can be used at temperatures up to 650°C (1200°F) and Copper-Constantan can be used accurately over its entire calibration range of 399°C (750°F). Noble metal calibrations are limited by the compensating alloys to ambient use of 260°C (500°F). No damage will be done by exposure to higher temperatures, but accuracies may exceed limits of error if a temperature gradient exists across the connector.

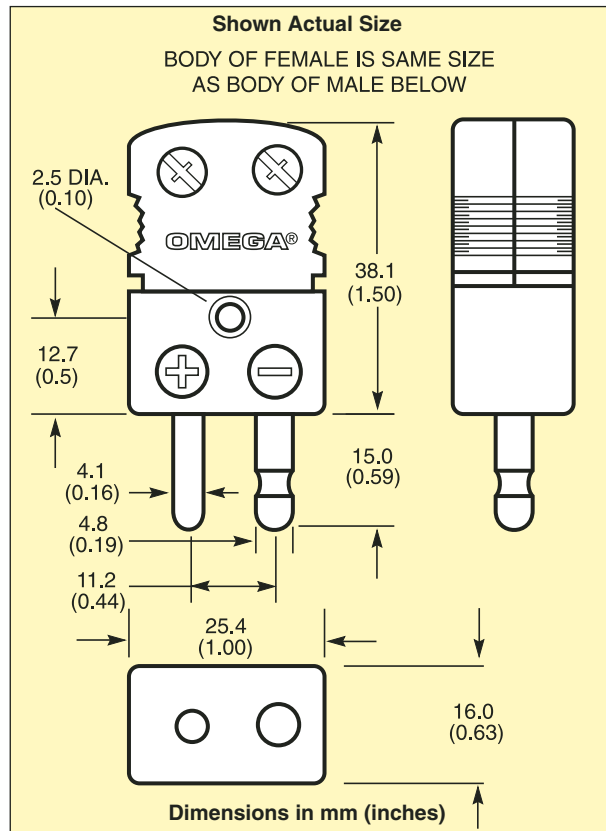

Ceramic Ultra High-Temperature Standard Size Connectors

High Purity Alumina Ceramic

-29 to 650°C (-20 to 1200°F)

ANSI color code shown
To order IEC color code see omega.com

- ✓ Extra Heavy Duty Ceramic Construction
- ✓ One-Piece Body Design
- ✓ Color-Coded Dot
- ✓ Type UHX Has Removable Color Dot*** for Vacuum Furnace Applications
- ✓ Combination Phillips/Slot Screws

NHX/UHX Starts at **\$18⁵⁰** Basic Pair



OMEGA® NHX Ceramic Connectors are permanently color-dot coded to conform to ANSI and OMEGA standards. The one-piece body construction minimizes loose hardware. OMEGA® UHX Ceramic Connectors are identical to the NHX models, and are also constructed to eliminate any contaminants. The UHX connector is ideally suited for applications such as high vacuum furnaces where contamination could adversely affect the process. All UHX connectors are shipped with a removable color-coding dot.

Discount Schedule	
1-10Net
11-2410%
25-4915%
50-9920%
100-99925%
1000 and over...	Consult Sales



PATENTED
Covered by U.S. and International Patents and pending applications

MOST POPULAR MODELS HIGHLIGHTED!

To Order (Specify Model Number)										
Alloy Code†	Compensating Alloy Used in Connector		ANSI Color Code	Hollow-Pin Model Number*	Price		Solid-Pin Model Number*	Price		
	+	-			Pair (NHXH Male** w/ NHX Female) (MF)	Male** (M)		Pair (MF)	Female (F)	Male (M)
K	CHROMECA®	ALOMEGA®	Yellow	NHXH-K-(*)	\$16.50	\$7.75	NHX-K-(*)	\$18.50	\$8.75	\$9.75
T	Copper	Constantan	Blue	NHXH-T-(*)	16.50	7.75	NHX-T-(*)	18.50	8.75	9.75
J	Iron	Constantan	Black	NHXH-J-(*)	16.50	7.75	NHX-J-(*)	18.50	8.75	9.75
E	CHROMECA®	Constantan	Purple	NHXH-E-(*)	16.50	7.75	NHX-E-(*)	18.50	8.75	9.75
R/S	Copper	RNX/SNX	Green	NHXH-R/S-(*)	16.50	7.75	NHX-R/S-(*)	18.50	8.75	9.75
G	GPX	GNX	Red/Gn	N/A	N/A	N/A	NHX-G-(*)	18.50	8.75	9.75
C	CPX	CNX	Red	N/A	N/A	N/A	NHX-C-(*)	18.50	8.75	9.75
D	DPX	DNX	Red/Wht	N/A	N/A	N/A	NHX-D-(*)	18.50	8.75	9.75
U	Copper	Copper	White	NHXH-U-(*)	16.50	7.75	NHX-U-(*)	18.50	8.75	9.75
N	OMEGA-P®	OMEGA-N®	Orange	NHXH-N-(*)	23.00	10.75	NHX-N-(*)	26.00	12.25	13.75

* To order, specify "MF" for connector pair, "M" for male connector only, or "F" for female connector only.
 ** The NHXH male mates with NHX female. NHXH-MF pair includes one NHXH male and one NHX female connector.
 *** To order UHX connectors with removable color dot, change "NHXH" to "UHXX" in model number, same price.
 To order UHXH connectors with removable color dot, change "NHXH" to "UHXXH" in model number, same price.
 † J, K, T, E, R, S and B are ANSI designations. OMEGALLOY®, Type N, is generically known as Nicrosil-Nisil. ANSI color coded models shown.
 Note: Type U (uncompensated) connectors are used with Type B thermocouples.
 Ordering Examples: NHX-K-MF, CHROMECA®-ALOMEGA®, solid-pin connector pair, \$18.50.
 UHX-K-MF, CHROMECA®-ALOMEGA®, solid-pin connector pair with removable color dot, \$18.50.

G



UNITED STATES

www.omega.com
1-800-TC-OMEGA
Stamford, CT.

CANADA

www.omega.ca
Laval(Quebec)
1-800-TC-OMEGA

GERMANY

www.omega.de
Deckenpfronn, Germany
0800-8266342

UNITED KINGDOM

www.omega.co.uk
Manchester, England
0800-488-488

FRANCE

www.omega.fr
Guyancourt, France
088-466-342

CZECH REPUBLIC

www.omegaeng.cz
Karviná, Czech Republic
596-311-899

BENELUX

www.omega.nl
Amstelveen, NL
0800-099-33-44



More than 100,000 Products Available!

• Temperature

Calibrators, Connectors, General Test and Measurement Instruments, Glass Bulb Thermometers, Handheld Instruments for Temperature Measurement, Ice Point References, Indicating Labels, Crayons, Cements and Lacquers, Infrared Temperature Measurement Instruments, Recorders Relative Humidity Measurement Instruments, RTD Probes, Elements and Assemblies, Temperature & Process Meters, Timers and Counters, Temperature and Process Controllers and Power Switching Devices, Thermistor Elements, Probes and Assemblies, Thermocouples Thermowells and Head and Well Assemblies, Transmitters, Wire

• Flow and Level

Air Velocity Indicators, Doppler Flowmeters, Level Measurement, Magnetic Flowmeters, Mass Flowmeters, Pitot Tubes, Pumps, Rotameters, Turbine and Paddle Wheel Flowmeters, Ultrasonic Flowmeters, Valves, Variable Area Flowmeters, Vortex Shedding Flowmeters

• pH and Conductivity

Conductivity Instrumentation, Dissolved Oxygen Instrumentation, Environmental Instrumentation, pH Electrodes and Instruments, Water and Soil Analysis Instrumentation

• Data Acquisition

Auto-Dialers and Alarm Monitoring Systems, Communication Products and Converters, Data Acquisition and Analysis Software, Data Loggers Plug-in Cards, Signal Conditioners, USB, RS232, RS485 and Parallel Port Data Acquisition Systems, Wireless Transmitters and Receivers

• Pressure, Strain and Force

Displacement Transducers, Dynamic Measurement Force Sensors, Instrumentation for Pressure and Strain Measurements, Load Cells, Pressure Gauges, Pressure Reference Section, Pressure Switches, Pressure Transducers, Proximity Transducers, Regulators, Strain Gages, Torque Transducers, Valves

• Heaters

Band Heaters, Cartridge Heaters, Circulation Heaters, Comfort Heaters, Controllers, Meters and Switching Devices, Flexible Heaters, General Test and Measurement Instruments, Heater Hook-up Wire, Heating Cable Systems, Immersion Heaters, Process Air and Duct, Heaters, Radiant Heaters, Strip Heaters, Tubular Heaters