
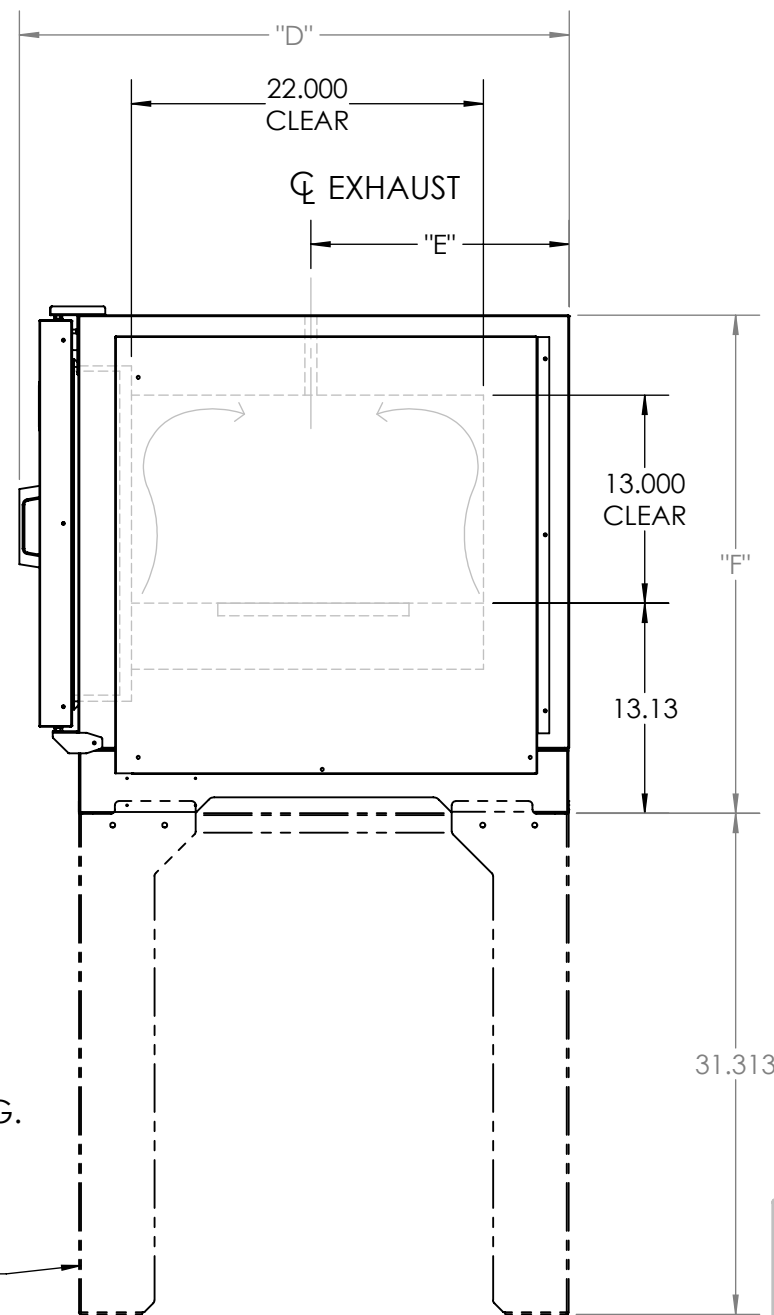


OVEN DIMENSIONS

MODEL	WORK SPACE W x D x H	KW 115V	KW 208/230V	VOLUME CU. FT.	INSULATION THICKNESS	"A"	"B"	"C"	"D"	"E"	"F"
NT-800	26" x 22" x 13"	2.4	3.0	4.3	4"	34"	39.5"	7.5"	33.4"	15.1"	30.1"
NTR-800	26" x 22" x 13"	2.4	3.0	4.3	4"	34"	39.5"	7.5"	33.4"	15.1"	30.1"
NT-1000	26" x 22" x 13"	2.4	3.0	4.3	5"	35"	41.5"	8.5"	34.4"	16.1"	31.1"
NTR-1000	26" x 22" x 13"	2.4	3.0	4.3	5"	35"	41.5"	8.5"	34.4"	16.1"	31.1"

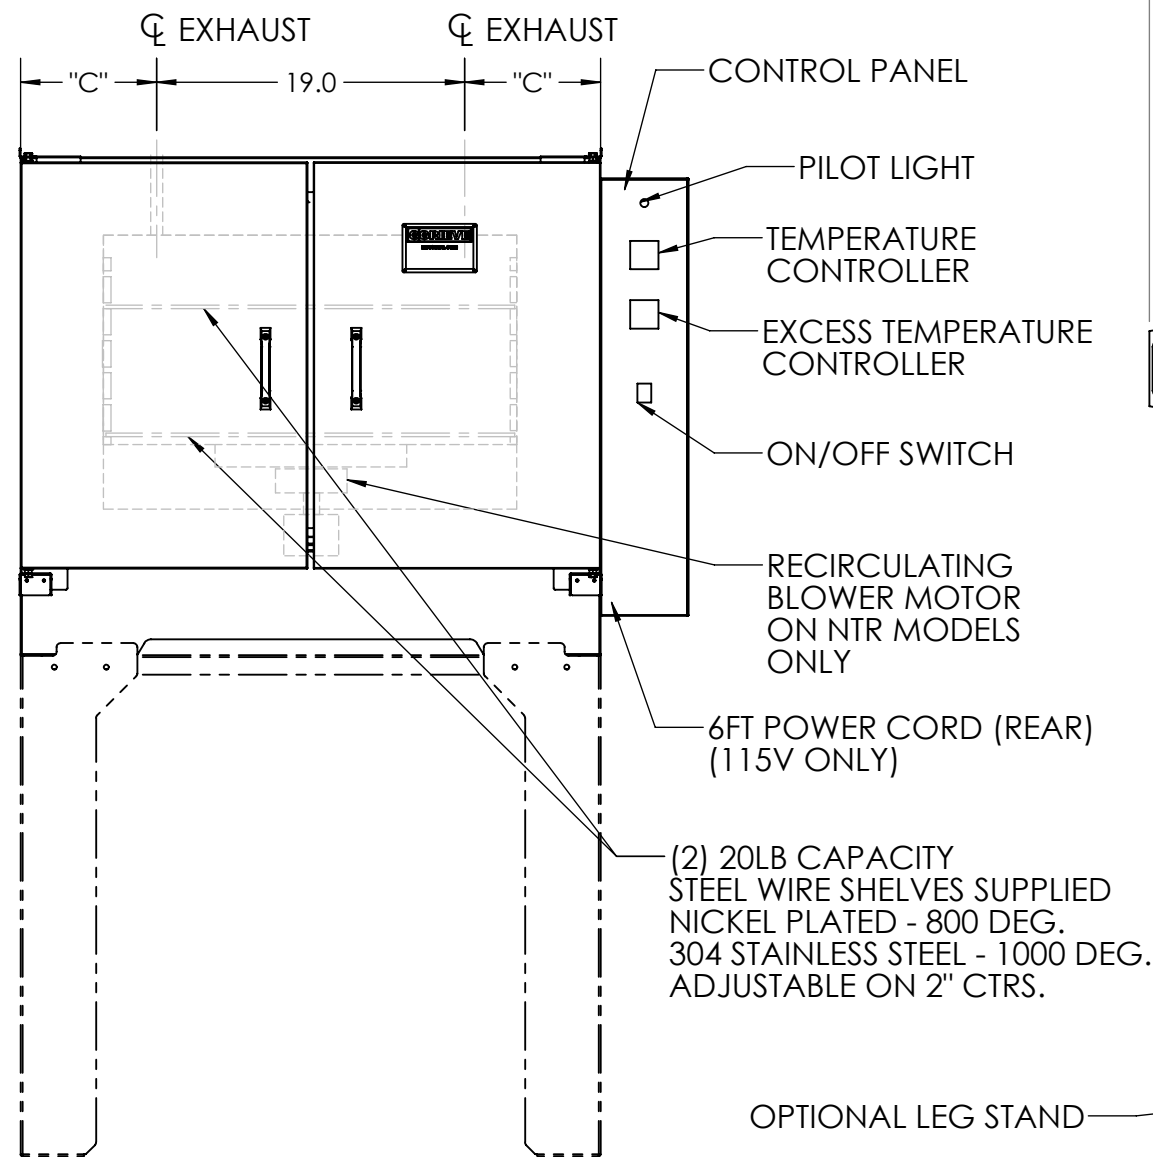

NOTES

- STANDARD ELECTRICAL SERVICE:
115/1/60, 3-WIRE CORD PLUG
208/1/60, 230/1/60, 460/1/60

115V REQUIRES 30 AMP SERVICE.

OTHER ELECTRICAL CHARACTERISTICS AVAILABLE
- MAX. OPERATING TEMPERATURE:
NT-800, NTR-800: 800 DEG. F
NT-1000, NTR-1000: 1000 DEG. F
- AIR FLOW: HORIZONTAL, BOTTOM TO TOP
- INTERIOR: 304 STAINLESS STEEL, WITH CARBON STEEL BLOWER WHEEL
- EXTERIOR: 304 BRUSHED STAINLESS STEEL

REV.	DESCRIPTION	BY	DATE
DESCRIPTION			
CUSTOMER			
MODEL NT-800, NTR-800, NT-1000, NTR-1000 HIGH TEMPERATURE BENCH OVENS			
SHOP ORDER			
DRAWN BY	PJD	DWG. NO.	NT-800, NTR-800
DATE	PRINT DATE	5/29/2013	NT-1000, NTR-1000

This drawing is the property of THE GRIEVE CORPORATION, and may not be used or reproduced without the express permission of THE GRIEVE CORPORATION